



Your future's safe!



Magnus RFID

RFID safety switches

short form

Magnus RFID: next generation sensors for machine safety

The best in cost-effectiveness


Wear-free technology allows for longer product life time.
Status LED and diagnostic output.
Smallest design of RFID safety sensors.
Full mechanical compatibility with Magnus MG S and MG B.
Can be used as stand-alone.

The best in safety

Tampering protection in accordance with DIN EN 14119, the highest in its class.
Screw covers prevent easy removal.
Series connection up to PL e/SIL 3.
IP67 and IP6K9K protection grade for use in harsh environments.
Complies with the strict hygiene and cleaning requirements of the food and packaging industry.

The best in versatility

Dual mounting options.
M12 connector or cable.
3 different coding levels.
Extension cables for series connection.

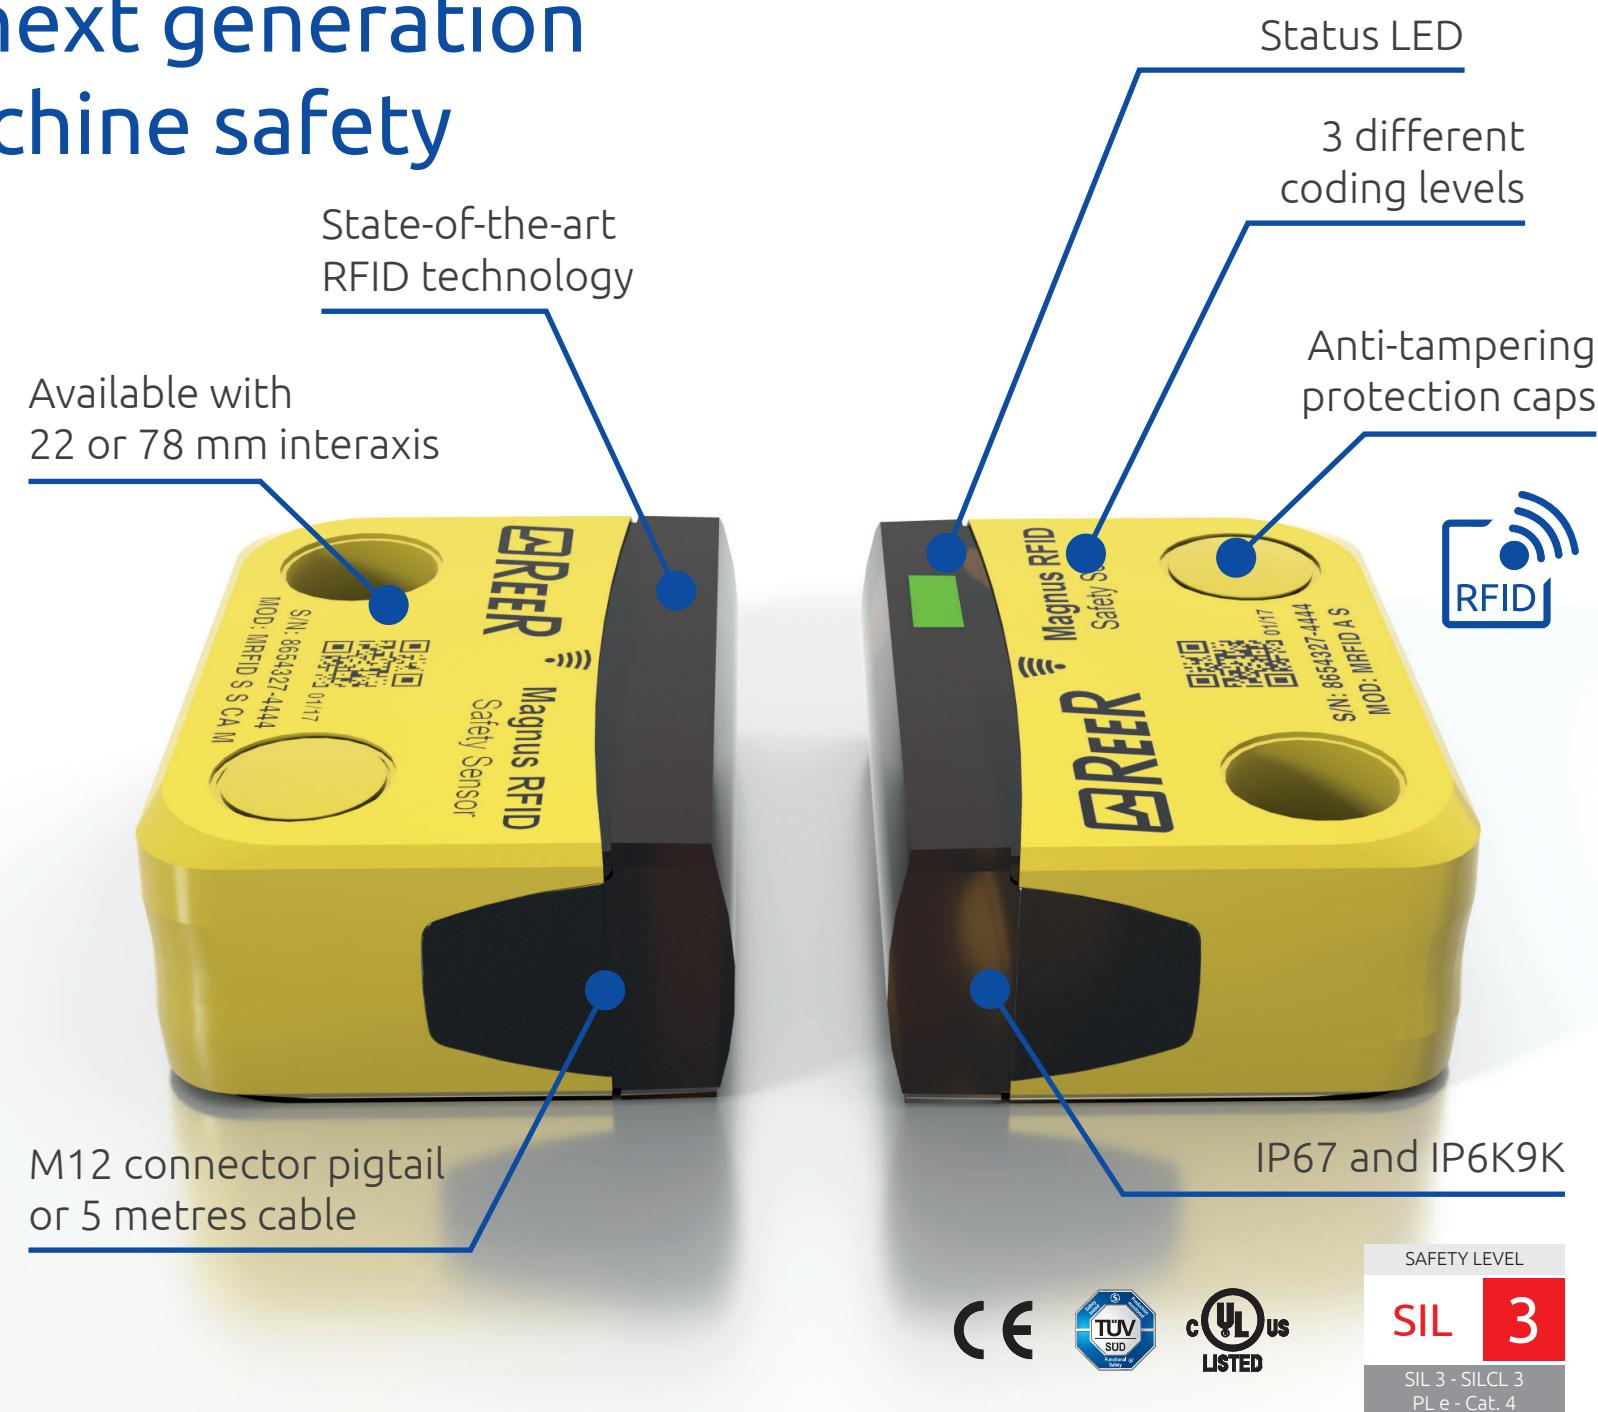

Typical applications

Magnus RFID is the ideal choice for many industrial applications, including ...

... food & beverage, packaging, pharmaceuticals, printing, paper, logistics, renewable energies, chemicals, injection moulding and many more ...




Outstanding technical specifications


Technical drawings

S series

Cable

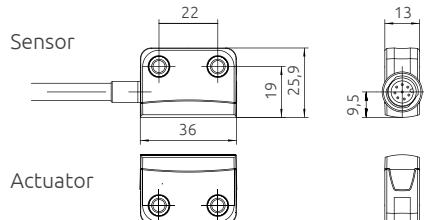


M12 connector

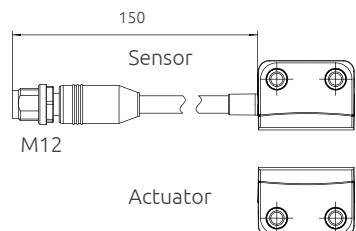


All measures in mm

B series


Cable

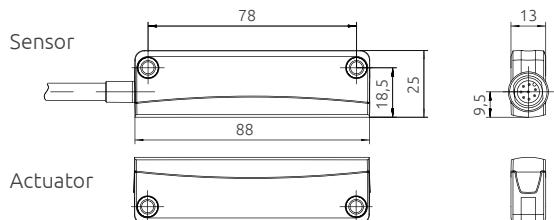

M12 connector

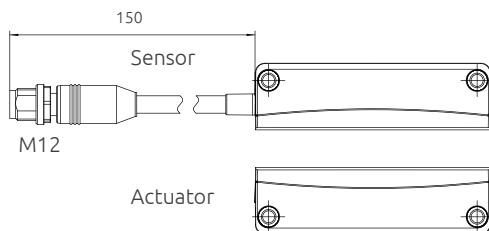


Circuit diagram

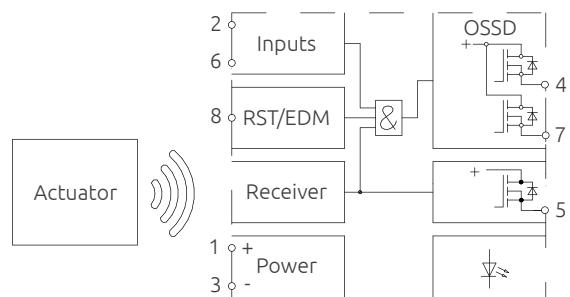

Pin-out

Pin	Function
1	VDC
2	Safety input 1
3	GND
4	Safety output 1
5	Diagnostic output
6	Safety input 2
7	Safety output 2
8	RST/EDM input




Accessories


Extension cables

Type

- S Male - Female
M12 connector (straight)
Length: 1, 3, 5, 10 m
Poles: 4 or 8
- L Male - Female
M12 connector (90°)
Length: 1, 3, 5, 10 m
Poles: 4
- C Female M12 connector
Length: 1, 3, 5, 10 m
Poles: 4 or 8

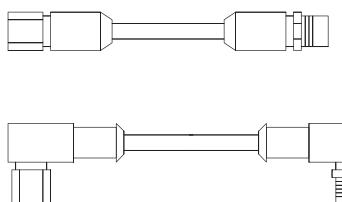

Connectors

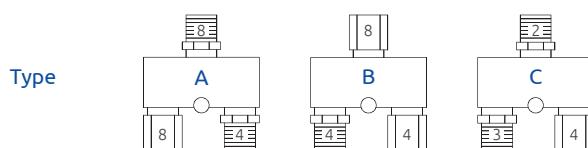

- Type A** To gain status output from the connected sensor
- Type B** For series connections of 2 or more sensors
- Type C** To introduce additional power supplies in long series

next generation RFID safety sensor

www.reersafety.com

Ordering information

Sensor + Actuator Combo¹

M RFID C	S	I	A	5
				M M12 Connector
				5 5 m cable
				A Automatic EDM input
	I	Individual coding		
	U	Unique coding		
	C	Actuator coded		
	S	22 mm interaxis		
	B	78 mm interaxis		

Extension cables (for series connection)

M RFID EC	S	4	3
		1 1 m cable	
		3 3 m cable	
		5 5 m cable	
		10 10 m cable	
	4	4 poles connector / 4 wires cable	
	8	8 poles connector / 8 wires cable	
	S	Male - Female M12 connector (straight)	
	L	Male - Female M12 connector (90°) ²	
	C	Female M12 connector cable	

T Connectors (for series connection)

M RFID TC	A	A M12 Type A
		B M12 Type B
		C M12 Type C

Accessories

M RFID SP Spacers available for S or B series (recommended for mounting on metal surfaces)

M RFID TP Termination plug (to close the last Type B connector in series connections of 2 or more sensors)

Notes

1 Each Combo set is provided with a Sensor and the corresponding Actuator. Sensors and Actuators can be also ordered separately, please enquire within
2 4-pole version available only

Technical data

Electrical specifications	S series	B series
Supply voltage	24 VDC ± 10%	
Max. switching voltage	Supply voltage ± 0,2 V	
Switching current safety output	Max. 400 mA	
Switching current control output	Max. 50 mA	
Contact form	OSSD	
Switching frequency	3 Hz	
Transition time	Input-Output: 3 ms / Sensor-Actuator: 75 ms	
No. of safety outputs electronic	2	
No. of diagnostic outputs electronic	1	
Number of safety inputs	2	
EDM input	Yes	
Start button	Yes	
Functional category	DC-12 / DC-13	
Assured switching distance	8 mm	
Safe distance for switching off	18 mm	
Minimum air-gap	0,5 mm	
Misalignment actuator	Max. 8 mm	
Reverse polarity protection	Yes	
Short-circuit proof outputs	Yes	
Current consumption per input	2,75 mA	
Indication LED	Three-colour	
Operating direction	Any direction	
Switching principle	Electronic	
Repeating accuracy (R)	< 0,5 mm	
Hysteresis	2 mm	
Series connection	Max. 30 sensors	
Technology	RFID	
Possible actuators	M RFID A S	M RFID A B

Environmental features

Protection class	IP67 (all models) / IP6K9K (only models with cable)
Operating temperature	- 25 ... 70 °C
Shock resistance	30 g / 11 ms
Vibration resistance	10 ... 55 Hz, amplitude 1 mm

Mechanical data

Housing material	PBT / PC
Housing	Rectangular
Connector type	Pigtail M12 / 8-pole / 150 mm
Cable	5 m PVC / 8 wires
Cross-section of wire	0,25 mm ²
Temp. range cable	- 25 ... 80 °C
Dimensions (height x width x depth)	26 x 36 x 13 mm
Mounting type	26 x 88 x 13 mm M4 screws (countersunk)

Approvals

CE	Yes
UL	Yes
SGL (Ecolab)	Yes
PL	e
SIL	3
SIL CL	3
Category	4

Quality, reliability and an extensive range of products

Cost-effective and reliable solutions

Multiple options of actuation technology



Individual coding

The actuator is programmed via teach-in and permanently assigned to the sensor during set-up (the process can be repeated if necessary).

Unique coding

The actuator is permanently assigned to the sensor during manufacturing (it cannot be replaced with another actuator).

Actuator coded

The actuator is free and not specifically assigned to the sensor (one actuator can work with multiple sensors).

Series connection with maximum safety

Up to
PL e
Performance Level
according to
EN ISO 13849-1

Reliable evaluation,
e.g. with the modular
safety controller **Mosaic** ...

MOSAIC



... or with the **AD SR1**
configurable
safety control unit



Transition time between Input and Output: 3 ms, the shortest in the market



Magnus RFID

Range to fit all applications

2 series ideal for all applications

S series

22 mm interaxis



Dimensions compatible with Magnus MG S series

B series

78 mm interaxis



Dimensions compatible with Magnus MG B series

Ideal also in the most demanding applications

Unique mechanical characteristics allow protection against cleaning agents and washdown processes, a typical requirement of the food industry.



Resistant to aggressive elements, e.g. cleaning agents used in the food industry.



Waterproof housing compliant with **IP67** and **IP6K9K** requirements (SGL according to Ecolab standards).

Connectivity

Cable or M12 Connector

Magnus RFID satisfies all requirements with regards to connectivity. Cables and connectors approved for the food industry complete the range of sensors.





Your future's safe!

More than 60 years of quality and innovation

Founded in Turin, Italy in 1959, Reer distinguished itself for its strong commitment to innovation and technology.

A steady growth throughout the years allowed Reer to become a point of reference in the safety automation industry at a worldwide level.

The Safety Division is in fact today a world leader in the development and manufacturing of safety optoelectronic sensors and controllers.

Reer is ISO 9001, ISO 14001 and ISO 45001 certified.



Reer SpA
Via Carcano, 32
10153 Torino, Italy

T +39 011 248 2215
F +39 011 859 867

www.reersafety.com | info@reer.it



Issue 2 - Rev. 1.4
February 2020
8946242
Brochure MAGNUS RFID - English

Printed in Italy

